

LM130EVF

DC GARAGE DOOR OPENER SUITED FOR SECTIONAL GARAGE DOORS

Combining Sophisticated Design With Innovative Technology



KEY FEATURES

2 YEAR WARRANTY

Peace of Mind

LIFTING POWER

Powers Spring Balanced 200Kg Doors

SMART



MYQ CAPABLE TECHNOLOGY LETS USERS CREATE SCHEDULES, MONITOR, RECEIVE ALERTS AND CONTROL THE GARAGE DOOR OPENER AWAY FROM HOME.¹

POWERFUL AND RELIABLE

FAST SPEED FAST OPENING SPEED OF 130MM/PER SECOND TO MAXIMIZE YOUR TIME

LED LIGHTING POWERFUL LED LIGHTING TO PROVIDE BRIGHTER COVERAGE OF LIGHTING IN THE GARAGE SPACE

SOFT-START AND SOFT-STOP SMOOTH OPERATION

AUTOMATIC STOP ADDITIONAL SAFETY WITH AUTOMATIC STOP BY PRESSING A BUTTON DURING FORWARD OR BACKWARD RUN AND OBSTACLE DETECTION

2 YEAR WARRANTY FULL 2 YEAR PRODUCT WARRANTY FOR PEACE OF MIND

SECURE

TIMER-TO-CLOSE AUTOMATICALLY CLOSES THE DOOR AFTER A PRESET AMOUNT OF TIME

SECURITY+ 2.0® TRANSMITTERS COMMUNICATE ON MULTIPLE FREQUENCIES WITH ENCRYPTED ROLLING CODE. THIS ENSURES THE STRONGEST FREQUENCY IS SELECTED EVERY TIME, VIRTUALLY ELIMINATING INTERFERENCE WHILE PROVIDING THE HIGHEST LEVEL OF SECURITY

INCLUDED ACCESSORIES

<p>SECURITY+ 2.0 PREMIUM+ REMOTE CONTROL Operates up to 4 garage door openers</p>		<p>ME960-LM</p>
<p>WIRELESS WALL CONTROL Controls up to two garage door openers and is backed by Security+ 2.0 technology</p>		<p>128EV</p>
<p>PROTECTOR SYSTEM (SAFETY IR BEAMS) The Protector System (Safety IR Beams) reliably stops opening and closing when the beam is obstructed or broken. This safety feature can prevent injury or damage to vehicles, people and pets</p>		<p>771EVK</p>

POWERFUL ADD-ONS

<p>PHOTOCELLS (Safety IR Beams) auto-reverses the door if there's an obstruction</p>		<p>771ESA</p>
<p>MYQ GATEWAY Gateway device to enable myQ functionality</p>		<p>828EV</p>

¹ Additional purchase of myQ Gateway and Safety IR Beams accessories required to enable myQ functionality. Visit LiftMaster-me.com for further information. Not Suitable for Outdoor or Non-Covered Installation.

LM130EVF

DC GARAGE DOOR OPENER SUITED FOR SECTIONAL GARAGE DOORS

MASTERFUL ENGINEERING.

MOTOR



- Heavy-Duty 24V DC
- Automatic Thermal Protection
- Permanent Lubrication

POWER




- 220-240V AC
- 50-60 Hz Voltage

MECHANICS



- **Steel Chassis and Plastic Cover**
- **Drive Belt With One Piece Rail**
- **Internal Chain and Sprocket Drive Mechanism**
- **Auto-Force** Adjustment for Changing Weather and Environmental Conditions
- **Electronic Limits** for Easy Setup

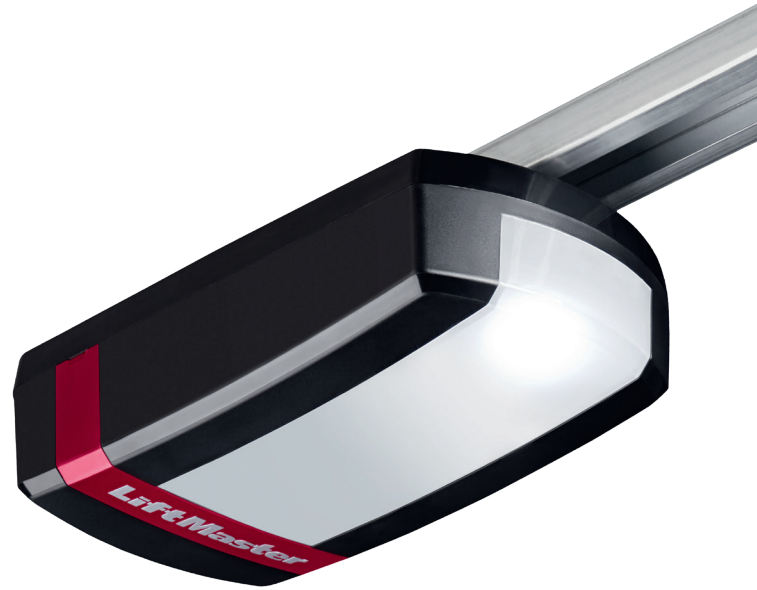

DIMENSIONS



- **Max. Door Size:** 4.2m high by 5.5m Wide. Max 21m²
- **Max Spring Balanced Load:** 12Kg
- **Headroom Clearance Required:** 230mm from Center of Torsion Bar



MAX. DOOR WEIGHT
200kg

SAFETY AND SECURITY.

SAFETY

- Alert-2-Close/Unattended Close Operation^{††}
- Emergency/Quick Release
- Ventilation/Pet Opening
- Down Safety Reverse
- Up Safety Stop
- Maintenance Alert System

^{††} Note: to reduce the risk of injury to persons, only use Alert-2-Close/Unattended Close Operation features when installed with a sectional door.

SECURITY

SECURITY+

RADIO CONTROLS
ME960-LM Remote Control: 433 MHz

SHIPPING.


SHIPPING WEIGHT

6.35kg

CARTONS (1)

CARTON 1: L 33cm x W 32cm x H 19cm

- Garage Door Opener (LM130EVF)
- ME960-LM Security+ 2.0 Premium+ Remote Control
- 128EV Wired Push Button
- 771EVK Protector (Safety IR Beams)



LM130EVF

DC GARAGE DOOR OPENER SUITED
FOR SECTIONAL GARAGE DOORS