

LM3800TXSA

WALL MOUNT GARAGE DOOR OPENER

Wall Mount Design:
When Design Meets Technology.

KEY FEATURES

SPACE-SAVING
Design Maximizes Versatility

ULTRA-QUIET
Eliminates Sound & Vibration

LIFTING POWER
Powers Spring Balanced 130Kg Doors



POWERFUL AND RELIABLE

ULTRA-QUIET ELIMINATES SOUND AND VIBRATION THROUGH THE CEILING - PERFECT IF YOU HAVE A HOME WITH A ROOM ABOVE OR NEXT TO THE GARAGE

WALL MOUNT DESIGN FREES THE GARAGE CEILING OF HANGING OPERATORS AND RAILS AND OPENS UP THE SPACE FOR ADDITIONAL STORAGE

SOFT-START AND SOFT-STOP FOR SMOOTH OPERATION

AUTOMATIC STOP ADDITIONAL SAFETY WITH AUTOMATIC STOP BY PRESSING A BUTTON DURING FORWARD OR BACKWARD RUN AND OBSTACLE DETECTION

2 YEAR WARRANTY FULL 2 YEAR PRODUCT WARRANTY FOR PEACE OF MIND

SECURE

TIMER-TO-CLOSE AUTOMATICALLY CLOSES THE DOOR AFTER A PRESET AMOUNT OF TIME

SECURITY+ SENDS A NEW CODE WITH EVERY REMOTE CLICK

INCLUDED ACCESSORIES

<p>SECURITY+ BEARCLAW REMOTE CONTROL Operates up to 3 openers</p>		<p>94335E</p>
<p>WIRED PUSH BUTTON Controls up to one garage door opener and is backed by Security+ technology</p>		<p>041A4166</p>
<p>CABLE TENSION MONITOR Prevents the door opening if the safety cable isn't tight enough</p>		<p>041A6104</p>
<p>PROTECTOR SYSTEM (SAFETY IR BEAMS) Garage door opener fail safe infrared safety sensor</p>		<p>6770E</p>

POWERFUL ADD-ONS

<p>PREMIUM+ REMOTE CONTROL Each button is independently programmable and backed by Security+2.0 and Security+</p>		<p>041A4166</p>
<p>PHOTOCELLS (Safety IR Beams) auto-reverses the door if there's an obstruction</p>		<p>041A6104</p>

LM3800TXSA

WALL MOUNT GARAGE DOOR OPENER

MASTERFUL ENGINEERING.

LiftMaster

MOTOR



- Heavy-Duty 24V DC
- Automatic Thermal Protection
- Permanent Lubrication

POWER



- 220-240V AC
- 50-60 Hz Voltage
- 2.7A Current Rating

MECHANICS




- **Steel Chassis and Plastic Cover**
- **Internal Chain and Sprocket Drive Mechanism** (63:1 Gear Reduction)
- **Auto-Force** Adjustment for Changing Weather and Environmental Conditions
- **Electronic Limits** for Easy Setup

DIMENSIONS



- **Max. Door Size:** 3m high by 5.5m Wide. Max 16.5m²
- **Max Spring Balanced Load:** 15Kg
- **Headroom Clearance Required:** 230mm from Center of Torsion Bar

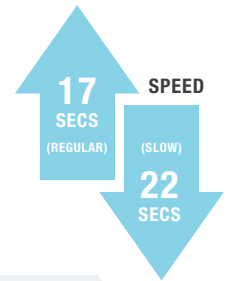

SAFETY AND SECURITY.

SAFETY

- Battery Backup Capable compatible model 475LM (optional accessory)
- Alert-2-Close/Unattended Close Operation^{††}
- Emergency/Quick Release
- Ventilation/Pet Opening
- Down Safety Reverse
- Up Safety Stop
- Maintenance Alert System

^{††} Note: to reduce the risk of injury to persons, only use Alert-2-Close/Unattended Close Operation features when installed with a sectional door.

SECURITY

SECURITY+

- RADIO CONTROLS
- Bearclaw Remote Control (94335E)
- Remote Control: 433 MHz

SHIPPING.


SHIPPING WEIGHT

14.20kg

CARTONS (1)

CARTON 1: L 61cm x W 26cm x H 30cm

- Garage Door Opener (LM3800TXSA)
- 94335E Security+ Bearclaw Remote Control
- 041A4166 Wired Push Button
- 041A6104 Cable Tension Monitor
- G770E Protector (Safety IR Beams)



LM3800TXSA

WALL MOUNT GARAGE
DOOR OPENER

2021 LiftMaster. All Rights Reserved.
Chamberlain Australia Pty Ltd
Unit 1, 75 Epping Rd, North Ryde NSW 2113 Australia
LiftMaster-me.com