

LM80EVF

DC GARAGE DOOR OPENER SUITED FOR SECTIONAL GARAGE DOORS

Combining Sophisticated Design With Innovative Technology


KEY FEATURES

2 YEAR WARRANTY

Peace of Mind

LIFTING POWER

Powers Spring Balanced 130Kg Doors

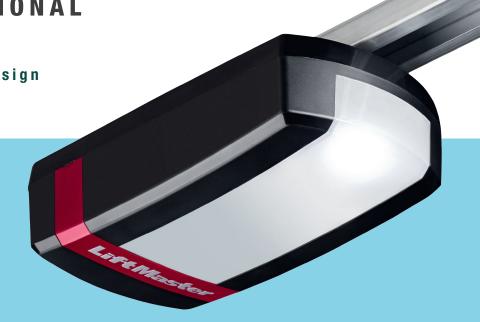

SMART



MYQ CAPABLE TECHNOLOGY LETS USERS CREATE SCHEDULES, MONITOR, RECEIVE ALERTS AND CONTROL THE GARAGE DOOR OPENER AWAY FROM HOME. 1

POWERFUL AND RELIABLE

FAST SPEED FAST OPENING SPEED OF 200MM/PER SECOND TO MAXIMIZE YOUR TIME

LED LIGHTING POWERFUL LED LIGHTING TO PROVIDE BRIGHTER COVERAGE OF LIGHTING IN THE GARAGE SPACE

SOFT-START AND SOFT-STOP SMOOTH OPERATION

AUTOMATIC STOP ADDITIONAL SAFETY WITH AUTOMATIC STOP BY PRESSING A BUTTON DURING FORWARD OR BACKWARD RUN AND OBSTACLE DETECTION

2 YEAR WARRANTY FULL 2 YEAR PRODUCT WARRANTY FOR PEACE OF MIND

SECURE

TIMER-TO-CLOSE AUTOMATICALLY CLOSES THE DOOR AFTER A PRESET AMOUNT OF TIME

SECURITY+ 2.0° TRANSMITTERS COMMUNICATE ON MULTIPLE FREQUENCIES WITH ENCRYPTED ROLLING CODE. THIS ENSURES THE STRONGEST FREQUENCY IS SELECTED EVERY TIME, VIRTUALLY ELIMINATING INTERFERENCE WHILE PROVIDING THE HIGHEST LEVEL OF SECURITY

INCLUDED ACCESSORIES

SECURITY+ 2.0 PREMIUM+ REMOTE CONTROL

Operates up to 4 garage door openers





ME960-LM

WIRELESS WALL CONTROL

Controls up to two garage door openers and is backed by Security+ 2.0 technology



128EV

POWERFUL ADD-ONS

PHOTOCELLS

(Safety IR Beams) auto-reverses the door if there's an obstruction





771ESA

MYQ GATEWAY

Gateway device to enable myQ functionality



828EV

¹ Additional purchase of myQ Gateway and Safety IR Beams accessories required to enable myQ functionality. Visit LiftMaster-me.com for further information.

Not Suitable for Outdoor or Non-Covered Installation.



MASTERFUL ENGINEERING.

MOTOR

O_O

- Heavy-Duty 24V DC
- Automatic Thermal Protection
- Permanent Lubrication

POWER



- 220-240V AC
- 50-60 Hz Voltage

MECHANICS



- Steel Chassis and Plastic Cover
- Drive Belt With One Piece Rail
- Internal Chain and Sprocket Drive Mechanism
- **Auto-Force** Adjustment for Changing Weather and Environmental Conditions
- Electronic Limits for Easy Setup





MAX. DOOR WEIGHT

130kg

DIMENSIONS



- Max. Door Size: 4.2m high by 5.5m Wide. Max 16m²
- Max Spring Balanced Load: 12Kg
- **Headroom Clearance Required:** 230mm from Center of Torsion Bar

SAFETY AND SECURITY.



- Alert-2-Close/Unattended Close Operation^{††}
- Emergency/Quick Release
- Ventilation/Pet Opening
- Down Safety Reverse
- Up Safety Stop
- Maintenance Alert System

SECURITY

SECURITY+ 2.0®

RADIO CONTROLS
ME960-LM Remote Control: 433 MHz

SHIPPING.

SHIPPING WEIGHT

6.35kg

CARTONS (1)

CARTON 1: L 33cm x W 32cm x H 19cm

- Garage Door Opener (LM80EVF)
- ME960-LM Security+ 2.0 Premium+ Remote Control
- 128EV Wired Push Button

^{††} Note: to reduce the risk of injury to persons, only use Alert-2-Close/Unattended Close Operation features when installed with a sectional door.